





Guppy PRO

F-031

- Compact VGA camera
- · Robust metal housing
- Sony ICX618 CCD sensor
- 123 fps

Concentrated simplicity

Guppy PRO - Small economical FireWire camera

Guppy PRO F-031 with Sony ICX618 runs 123 frames per second at 0.3 MP resolution.

The Guppy PRO is Allied Vision's smallest economical FireWire camera. Its ultra-compact and extremely robust industrial housing unites quality with performance and enables it to be integrated in the smallest spaces. The wide range of CCD and CMOS sensors with a range of different resolutions enables you to choose the ideal Guppy PRO for your particular needs.

Easy software integration with Allied Vision's Vimba Suite and compatibility to the most popular third party image-processing libraries.

See the Customization and OEM Solutions webpage for hardware options.



$\leq r$	$\Delta \cap$	ITIC	rati	ons
-	\mathcal{L}		Jali	OIIO

Interface IEEE 1394b - 800 Mb/s, 1 port

Resolution $656 (H) \times 492 (V)$

Sensor Sony ICX618

Sensor type CCD Progressive

Sensor size Type 1/4

Pixel size $5.6 \,\mu\text{m} \times 5.6 \,\mu\text{m}$

Lens mount (default) C-Mount

Max. frame rate at full resolution 123 fps

ADC 14 Bit

Output

Bit depth 8-bit to 14-bit

Monochrome pixel formats 8/12/16

RGB color pixel formats RGB8

Raw color pixel formats (Bayer) 8/12/16

General purpose inputs/outputs (GPIOs)

Opto-isolated I/Os 1/3

Operating conditions/dimensions

Operating temperature +5 °C to +45 °C

Power requirements (DC) 8 V to 36 V


Power consumption <3.5 W (@ 12 VDC)

Mass 80 g

Body dimensions (L \times W \times H in mm) 44.8 \times 29 \times 29 (including connectors)



Quantum efficiency

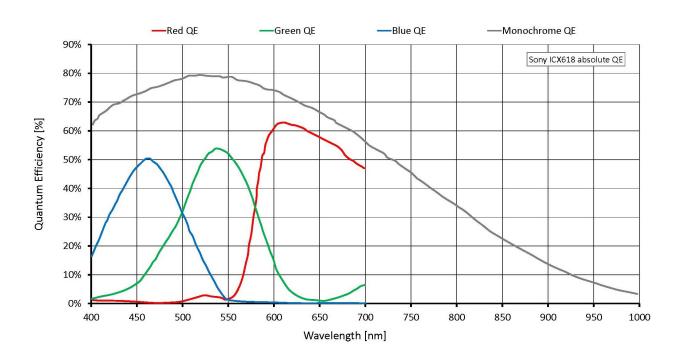



Features


- Look-up table (LUT)
- Gamma correction
- Color correction
- Area of interest (AOI), separate AOI for auto features
- Binning
- Sub-sampling
- Auto gain (manual gain control: 0 to 24.4 dB)
- Auto exposure (75 μs to 67 s)
- Trigger programmable, level, single, bulk, programmable delay
- Storable user sets

Scope of delivery

• Camera and IEEE 1394b cable (other configurations on request)



Technical drawing

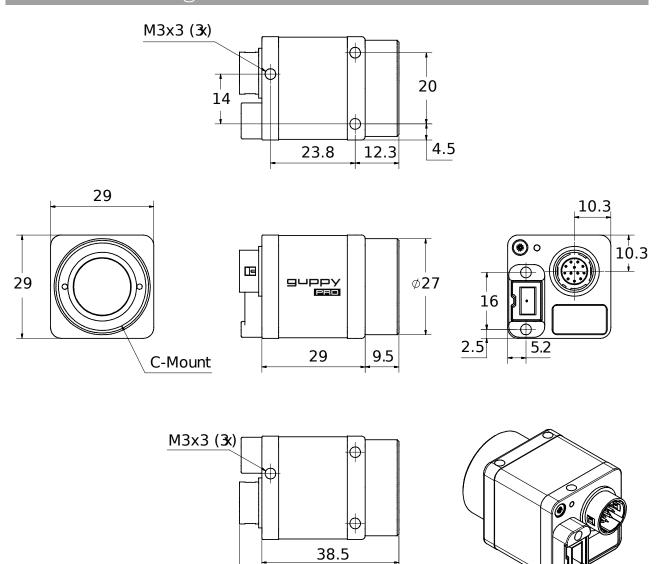

44.8



Applications

The Guppy PRO F-031B/F-031C is a fast and sensitive (also NIR sensitive) camera. Its robust, extremely compact design facilitates the integration into your system.

Typical Applications:

- Machine vision
- Robotics
- Semiconductor inspection
- Logistics
- Security and Surveillance
- Pharmaceutical industry
- Food inspection
- ITS/Traffic monitoring