





Guppy PRO

F-095

- Color camera
- ideal for 720p
- · Low-light camera
- High NIR sensitivity

Concentrated simplicity

Guppy PRO - Small economical FireWire camera

Guppy PRO F-095 with Sony ICX692 runs 38 frames per second at 0.9 MP resolution.

The Guppy PRO is Allied Vision's smallest economical FireWire camera. Its ultra-compact and extremely robust industrial housing unites quality with performance and enables it to be integrated in the smallest spaces. The wide range of CCD and CMOS sensors with a range of different resolutions enables you to choose the ideal Guppy PRO for your particular needs.

Easy software integration with Allied Vision's Vimba Suite and compatibility to the most popular third party image-processing libraries.

See the Customization and OEM Solutions webpage for hardware options.



| $\leq r$ | $\Delta \cap$ | ITIC | rati | ons |
|----------|---------------|------|------|------|
| - | \mathcal{L} | | Jali | OIIO |

Interface IEEE 1394b - 800 Mb/s, 1 port

Resolution 1280 × 720

Sensor Sony ICX692

Sensor type CCD Progressive

Sensor size Type 1/3

Pixel size $4.08 \mu m \times 4.08 \mu m$

Lens mount (default) C-Mount

Max. frame rate at full resolution 38 fps

ADC 14 Bit

Output

Bit depth 8-bit to 14-bit

Monochrome pixel formats 8/12/16

RGB color pixel formats RGB8

Raw color pixel formats (Bayer) 8/12/16

General purpose inputs/outputs (GPIOs)

Opto-isolated I/Os 1/3

Operating conditions/dimensions

Operating temperature +5 °C ... +45 °C

Power requirements (DC) 8 V - 36 V


Power consumption <3.5 W

Mass 80 g

Body dimensions (L \times W \times H in mm) 44.8 \times 29 \times 29 mm incl. connectors



Quantum efficiency

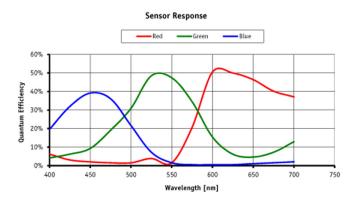




Features

- LUT (look-up table)
- Gamma
- Color correction
- AOI, separate AOI for auto features
- Binning
- Sub-sampling
- Auto gain (manual gain control: 0 to 24.4 dB)
- Auto exposure (39 µs to 67 s)
- Trigger programmable, level, single, bulk, programmable delay
- Storable user sets



Technical drawing

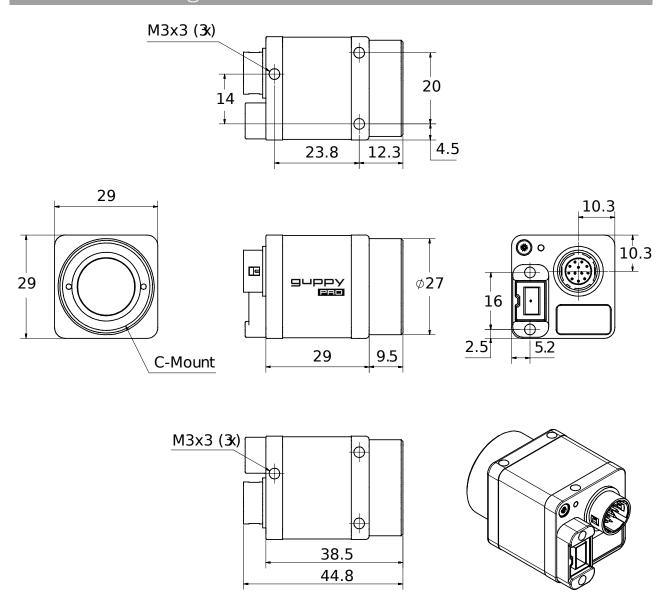

Applications

The Guppy PRO F-095C includes the new ICX692 sensor. This EXview HAD II sensor has a very good sensitivity both in the visible and NIR spectrum. Therefore, the Guppy PRO F-095C is well suited for low-light applications, especially security and surveillance.

- · Security and surveillance
- Applications with low light
- Industrial inspection
- ITS/traffic monitoring
- · ... and many more